




No. 2168 - 2169 SCREW BED
SINGLE SURFACERS

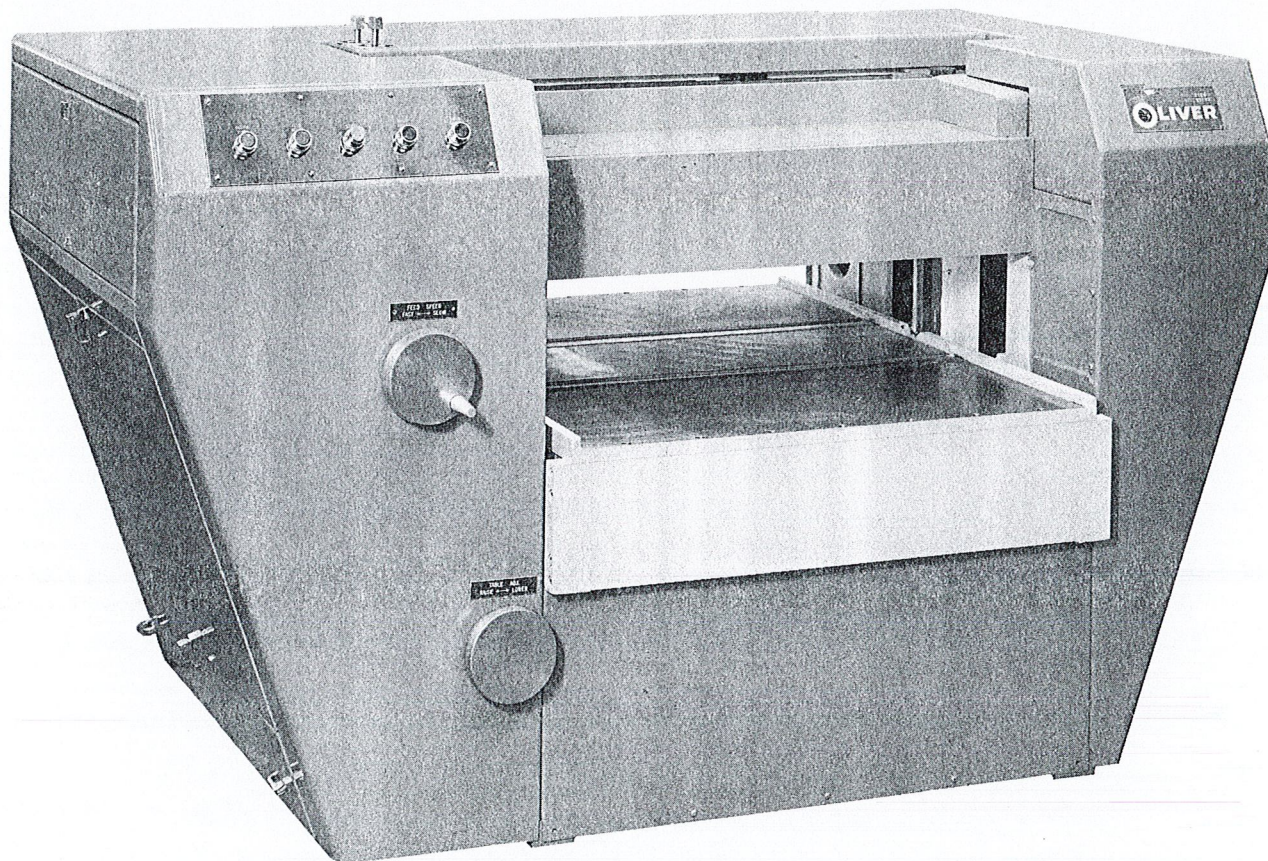

OLIVER

OLIVER MACHINERY COMPANY, GRAND RAPIDS, MICH. 49504

SPECIFICATIONS

MODEL	<u>2168</u>	<u>2169</u>
SIZE	30" x 8" (762 x 203.2 mm)	36" x 8" (914.4 x 203.2 mm)
TYPE	Screw-Bed	Screw-Bed
HEAD MOTOR	20 HP	25 HP
FEED MOTOR	2 HP	2 HP
TABLE HOIST MOTOR	1/3 HP	1/3 HP
CYLINDER	Inserted tooth carbide bit type	
CUTTING CIRCLE	5 1/4" (133.4 mm)	5 1/4" (133.4 mm)
EXHAUST HOOD OPENING DIAM.	7" (177.8 mm)	8" (203.2 mm)
CHIPBREAKER	Sectional - 2" (50.8 mm)	Sectional - 2" (50.8 mm)
FEED ROLLS		
2 Lower	5" Dia. (127 mm)	5" Dia. (127 mm)
1 Upper Outfeed	5" Dia. (127 mm)	5" Dia. (127 mm)
1 Sectional Infeed	5 5/8" Dia. (142.8 mm)	5 5/8" Dia. (142.8 mm)
Individual Sections	2" Wide (50.8 mm)	2" Wide (50.8 mm)
Feed Speeds	20 to 60 FPM	20 to 60 FPM
MAXIMUM CUT	1/2" (12.7 mm)	1/2" (12.7 mm)
KNIFE GRINDER	Standard	Standard
HAND BRAKE	Standard	Standard
SINGLE MICROMETER ADJUSTMENT		
Upper Outfeed Roll	Standard	Standard
Pressure Bar	Standard	Standard
Lower Rolls	Standard	Standard
NET WEIGHT	5000#	6500#

OTHER OPTIONS

MOTOR	25, 30 HP	30, 40 HP
-------	-----------	-----------

(Specifications are subject to change without notice.)

All models have magnetic controls with overload and low voltage protection and necessary wrenches.

110 volt control transformer and oil-tight NEMA #12 control enclosure are standard.

OLIVER MACHINERY COMPANY, GRAND RAPIDS, MICH. 49504
TELEPHONE NO. 616-456-1591

TELEX NO. 22-6483