



# OLIVER

No. 585

## OILSTONE TOOL GRINDER

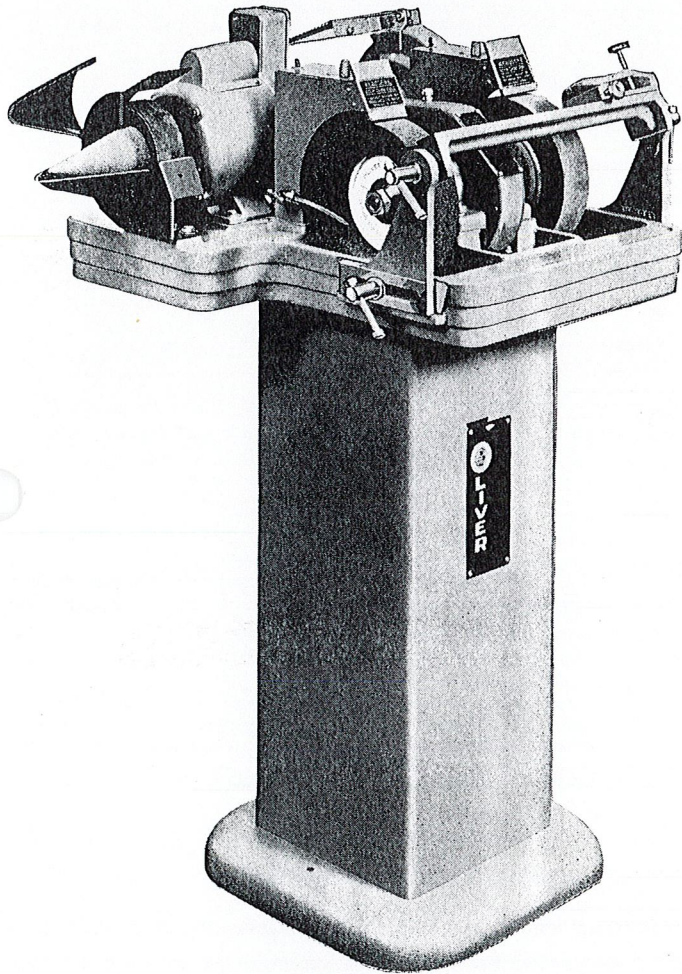

Left side view showing Oilstone wheels, emery cone and stropping wheel.

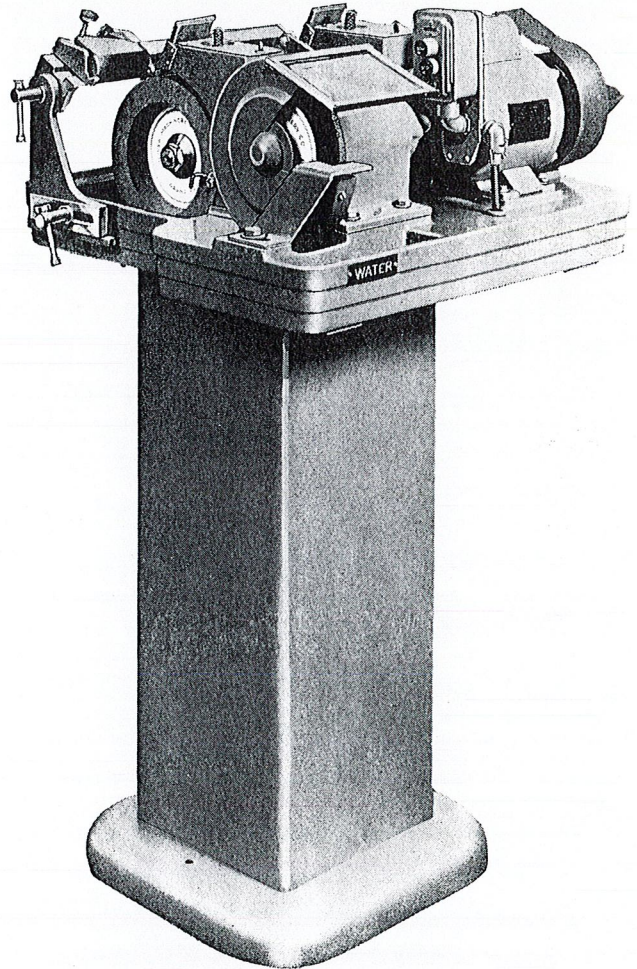

Right side view — Note Emery Wheel with Tool Rest as well as Oilstone Wheel and Tool Holder.



**OLIVER MACHINERY COMPANY, GRAND RAPIDS 2, MICHIGAN, U.S.A.**



**APPLICATION**

For sharpening hand scraping tools, plane bits, chisels, gouges, jointer knives up to 6" long, wood-turning tools and other woodshop tools.

**GENERAL CONSTRUCTION**

An efficient, compact, yet accessible tool grinder having two 8" x 2" oilstone cup wheels, operating at 300 RPM; 8" x 1/2" emery wheel, 5 1/4" x 1 3/8" leather stropping wheel and 3" diameter by 5" long emery cone - all operating at 1800 R.P.M.

All grinding wheel arbors and gears are mounted in high grade ball bearings.

**AUTOMATIC SATURATION SYSTEM**

An oil reservoir is mounted over each oilstone cup wheel and the oil is directed so as to drip on the inside of the cup wheels, through small tubes with faucets to regulate the flow of oil. Special wipers prevent the oil being thrown off the wheels.

**TABLE AND TOOL HOLDER**

The table extends across the front of the machine, tilts to any desired angle and has horizontal adjustment of several inches. It is fitted with a special tool holder for holding chisels, plane bits, etc., with screw feed arrangement for feeding the tools to the oilstones when grinding. Tool holder will hold Jointer knives up to about 6" long for hand sharpening on this machine.

**EMERY WHEEL TOOL REST**

The right angle tool rest permits grinding on the side of the emery wheel as well as on the face.

**SAFETY FEATURES**

"Safety First" is a dominant feature in the design of this machine. The gears and bearings are fully enclosed with cast iron covers. The oilstone wheels, emery wheel and emery cone have the most improved metal guards, the leather

stropping wheel has a guard on the offside. Belts and pulleys are entirely eliminated.

**MOTOR**

1/3 H.P. motor is fully enclosed, ball bearing, 1800 r.p.m., 110 or 220 volt, has ample power and may run from any 110 volt circuit.

A push button switch, conveniently mounted on the machine, is fully wired with cord and plug for 110 volts.

**FLOOR SPACE**

Machine is portable; 28" x 25".

**SPECIFICATIONS**

Motor - 1/3 H.P., 1800 r.p.m.

Oilstone Wheels - 8" x 2"

Cup type, 1 coarse, 1 fine

Emery Wheel - 8" x 1/2"

Stropping Wheel - 5 1/4" x 1 3/8"

Leather covered.

Emery Cone - 3" dia. 5" long.

**CODE, WEIGHT, ETC.**

CODE	MACHINE DESCRIPTION	WEIGHT CRATED	IN POUNDS BOXED	CUBIC FEET
Foga	No. 585 - Motor Driven Variety Grinder as shown .....	420	640	30



**OLIVER MACHINERY COMPANY**  
**Grand Rapids 2, Michigan, U.S.A.**

**BRANCH SALES OFFICES**

NEW YORK  
ATLANTA

PITTSBURGH  
COLUMBUS, O.

CLEVELAND  
DETROIT

CHICAGO  
NEW ALBANY, IND.

ST. LOUIS  
MINNEAPOLIS

DENVER  
SALT LAKE CITY

SEATTLE  
PORTLAND

SAN FRANCISCO  
LOS ANGELES